










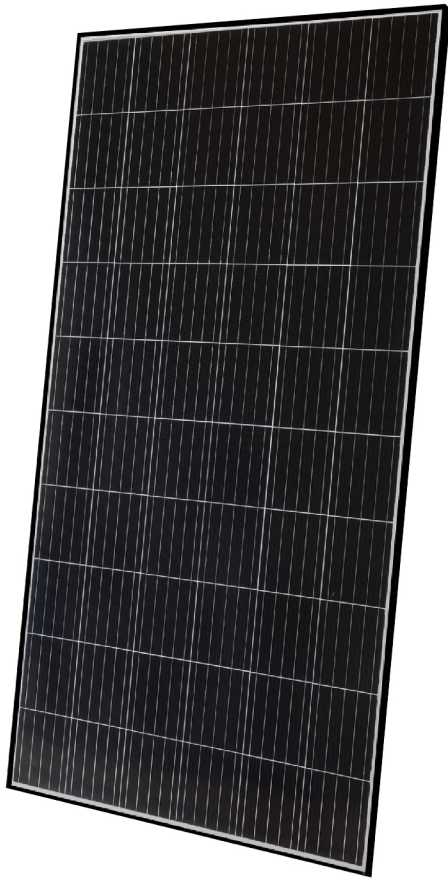









# FROG

LO SCALDABAGNO FOTOVOLTAICO  
PHOTOVOLTAIC WATER HEATER

 **Solare**  
**ed ecologico**



## Solar PV Series· A02

-   
Long Life Heating Element
-   
Blue Diamond Enamel Coating  
0.5MM
-   
Polyurethane Insulation  
PUF
-   
Enamel Inlet/Outlet
-   
Over Pressure Protection
-   
Horizontal Installation
-   
Whirl Flow Technology
-   
IPX4 Water Proof Grade
-   
Earthing Protection
-   
Anti Dry Heating Protection
-   
Smart Control
-   
DC&AC mode
-   
Touch Panel
-   
Anti-freedzed
-   
Remote Control
-   
PRCD
-   
Digital Display  
64%
-   
Solar PV System



Heating System	DC & AC heating		
Main parameter of AC heating	220V~,50Hz, 2KW,9.09A		
Temperature of AC Heating	30-75°C		
Temperature of DC Heating	65°C ON / 75°C OFF		
Capacity(L)	60	80	100
Main parameter of DC heating	DC80V, 1.6KW	DC80V, 1.2KW	
QTY of PV panel, pcs	1~2 in series	2~3 in series	2~3 in series
Net Size(mm)	Φ470*685	Φ470*815	Φ470*945
Packing Size(mm)	598*535*760	598*535*890	598*535*1020
Load QTY(20'GP/40'GP/40'HQ)	111/234/276	95/200/235	83/175/205